

CONTAINER CART, 100,000 LB. CAP. (T10000D-1PA)

Cage Code: 65059 | Drawing No: ST10000D | Revision: B | Sheet: 1 of 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
SEE ELECTRONIC PARTS LIST FOR BILL OF MATERIALS
DO NOT SCALE DRAWING

INTERCHANGEABLE CART
UNITS (AND REVERSABLE).
SIMPLY SET AT
APPROPRIATE LENGTH AND
LOWER CONTAINER ONTO
FASTMOUNT TWISTLOCKS.
LOCK TWISTLOCKS TO
SECURE TO CONTAINER.

FASTMOUNT TWISTLOC
SHOWN LOCKED

SIDE APERTURE OF A
STANDARD ISO 1161 CORNER
FITTING, TYP 8 PL

MOVE HANDLE TO LOCK
(SHOWN) OR UNLOCK

FASTMOUNT TWISTLOCK
SHOWN LOCKED

TANDEMLOC CONNECTOR
P/N: 12900BA-1PZ, 2 PC'S. USE TO
CONNECT BOTH CARTS TOGETHER FOR
SITE TO SITE TRANSPORT. (WITHOUT
CONTAINER MOUNTED)

CASTERS SWIVEL 360° BUT
WILL NOT PROTRUDE FROM
SIDES OF CONTAINER.

NOTES:

1. P/N: T10000D-1PA, CONTAINER CART ASSEMBLY
2. WLL: 100,000 LB AT 6 MPH AND 20° MAX INCLINE
3. PROOF TESTED TO 125% (125,000 LB.) AND CERTIFIED
4. STANDARD SPECIFICATION #EAD21000A APPLIES
5. FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW
6. CALCULATED WEIGHT: 2,430 LB.

| REV | DESCRIPTION | REVISIONS | DATE | APPROVED |
|-----|------------------------------|-----------|---------|----------|
| A | MADE TOWBAR OPTIONAL | | 12/1/04 | MD |
| B | ADDED SWIVEL LOCK TO SHEET 2 | | 11/1/06 | ML |

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: info@tandemloc.com • www.tandemloc.com

824 Highway 101 • Havelock, NC 28532

TEL: 1.800.258.7324 (252.447.7155)

FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.


Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.

| REV DESCRIPTION | REVISIONS | DATE | APPROVED |
|-----------------|------------------------------|---------|----------|
| A | MADE TOWBAR OPTIONAL | 12/1/04 | MD |
| B | ADDED SWIVEL LOCK TO SHEET 2 | 11/1/06 | ML |

CONTAINER CART, 100,000 LB. CAP. (T10000D-1PA)

Cage Code: 65059 | Drawing No: ST10000D | Revision: B | Sheet: 2 of 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
SEE ELECTRONIC PARTS LIST FOR BILL OF MATERIALS
DO NOT SCALE DRAWING

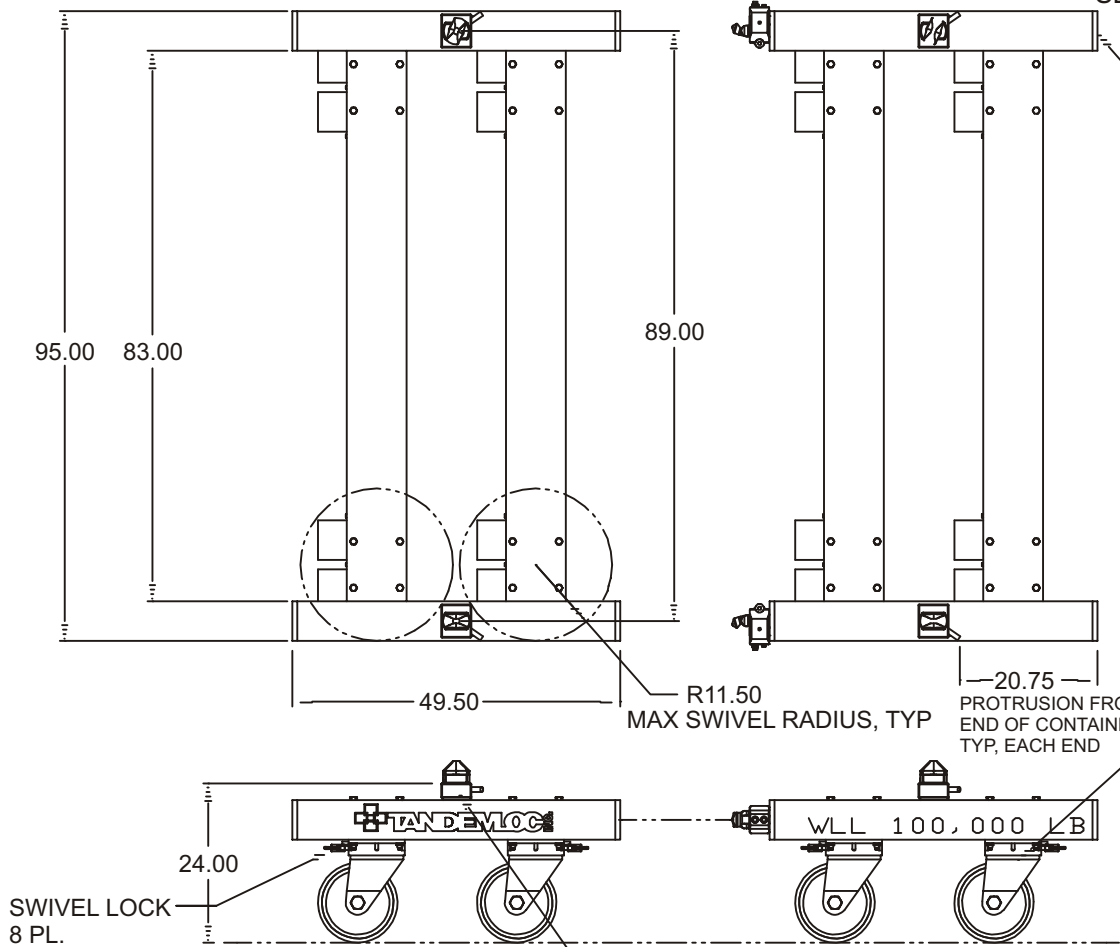

OPTIONAL TANDEMLOC
TOWBAR
P/N: AB42000A-1PA. USE AT

- NOTES:
1. P/N: T10000D-1PA, CONTAINER CART ASSEMBLY
 2. WLL: 100,000 LB
 3. PROOF TESTED TO 125% (125,000 LB.) AND CERTIFIED
 4. STANDARD SPECIFICATION #EAD21000A APPLIES
 5. FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW
 6. CALCULATED WEIGHT: 2,430 LB.

12" DIA X 6" WIDE URETHANE ON IRON
360° SWIVEL CASTERS, 12,500 LB CAP EACH,
WITH 4 POSITION (90°) SWIVEL LOCK. OTHER
CASTER TYPES AVAILABLE.

N2501BA-1PA FASTMOUNTS, 4 PL ENTER BOTTOM
HOLE OF STANDARD ISO 1161 CORNER FITTING.

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)
This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.
You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.
Dimensions are subject to manufacturing tolerance and change.



Email: info@tandemloc.com • www.tandemloc.com
824 Highway 101 • Havelock, NC 28532
TEL: 1.800.258.7324 (252.447.7155)
FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.
Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.