


This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use. You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse

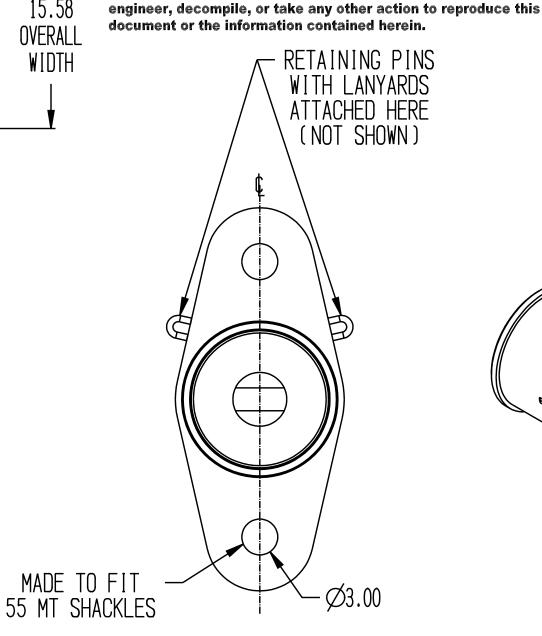


©2019 by Tandemioc, Inc.

Dimensions are subject to manufacturing tolerance and change.

REVISIONS

DESCRIPTION

DATE APPROVED

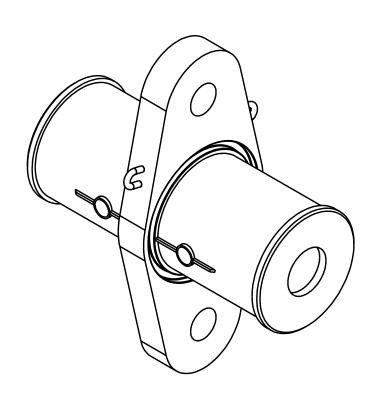

NOTES:

- PART NO.: AG08ALP-12X, 12" PIPE SLEEVE WITH CENTER LIFT WLL: 130,000 LB. STRAIGHT PULL
- 125% (162,500 LB.) AND CERTIFIED
- STANDARD SPECIFICATION # EAD21000A APPLIES

3.00 -

- SANDBLAST, PRIME AND PAINT SAFETY YELLOW

- ASME B30.20 AND BTH-1, DESIGN CATEGORY B, SERVICE CLASS O.
 DOES NOT ADD CAPACITY TO EXISTING SPREADER ASSEMBLY. TOTAL MAX CAPACITY FOR
 LIFT IS STILL LIMITED TO PUBLISHED END CAP CAPACITY/OR SPAN FOR GIVEN ASSEMBLY.
 SEE PUBLISHED CHART OR END CAP APP @ TANDEMLOC.COM
 NOT TO BE USED WITHOUT TOP SLING

MADE TO FIT

- 10. VERTICAL PICK ONLY

** DO NOT SIGN IF CHANGES ARE REQUIRED **				
CUSTOMER APPROVAL:				
DATE:				

X "X" DENOTES APPLICABLE DATA UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES & TOLERANCES ARE:	0 TO 4" ±.030 , 4.01" TO 7" ±.038"		
. XX ±.06 .XXXX ±.0007 .XXX ±.03			AG08ALP-12X 12" PIPE
TANDOM ON THE PROPERTY OF	APPROVALS	DATE	SIFEVE WITH CENTER LIFT
	DAH DAH	11-24-20	OLLLYL WITH OLIVILIX LII I
	ENGINEER ADD	11-24-20	SIZE CAGE CODE DAG NO. SAGORAL P-12X REV.
			U 65059 SAGUOALP-12X -