



This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use. You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein.

©2019 by Tandemioc, Inc.

Dimensions are subject to manufacturing tolerance and change.

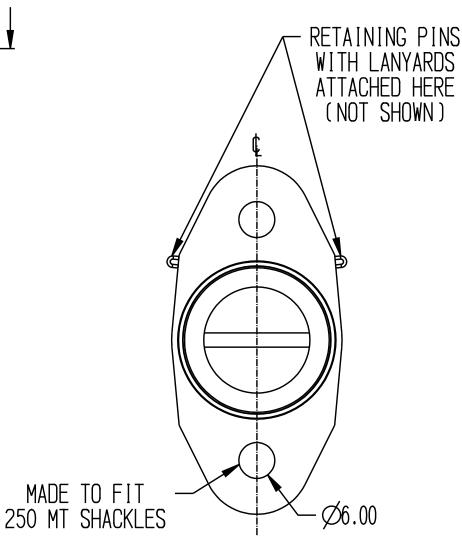

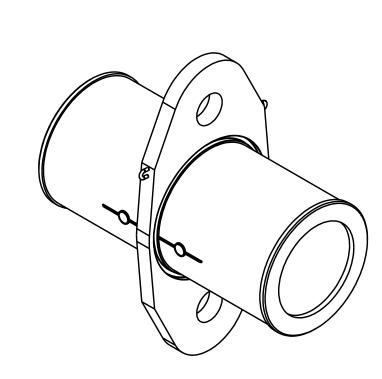

REV

NOTES:

- . PART NO.: AG08ALP-26X, 26" PIPE SLEEVE WITH CENTER LIFT 2. WLL: 500,000 LB. STRAIGHT PULL
- TO 110% (550,000 LB.) AND CERTIFIED
- STANDARD SPECIFICATION # EAD21000A APPLIES
- SANDBLAST, PRIME AND PAINT SAFETY YELLOW
- DESIGNED AND MANUFACTURED TO MEET OR EXCEED
- ASME B30.20 AND BTH-1, DESIGN CATEGORY B, SERVICE CLASS O.

 DOES NOT ADD CAPACITY TO EXISTING SPREADER ASSEMBLY. TOTAL MAX CAPACITY FOR LIFT IS STILL LIMITED TO PUBLISHED END CAP CAPACITY/OR SPAN FOR GIVEN ASSEMBLY. SEE PUBLISHED CHART OR END CAP APP @ TANDEMLOC.COM

 NOT TO BE USED WITHOUT TOP SLING
- 10. VERTICAL PICK ONLY

** DO NOT SIGN IF CHANGES ARE REQUIRED **				
CUSTOMER APPROVAL	L:			
DATE	i			

X 'X" DENOTES APPLICABLE DATA UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES & TOLERANCES ARE:	0 TO 4" ±.030 , 4.01" TO 7" ±.038"				
. XX ±.06 .XXXX ±.0007 .XXX ±.03			AG08ALP-26X 26" PIPE		
TANDEM OF THE DISCLOSURE OF	APPROVALS	DATE	l cı	SLEEVE	WITH CENTER LIFT
	DAH DAH	11-24-20			WITH CLIVILIN LIFT
	ENGINEER WOO	11-24-20	SIZE CA	65059	SAG08ALP-26X
			SCALE	1	OND WE SHEET 1 OF 1

REVISIONS

DESCRIPTION

DATE APPROVED