


This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use. You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein.

©2019 by Tandemloc, Inc.
Dimensions are subject to manufacturing tolerance and change.

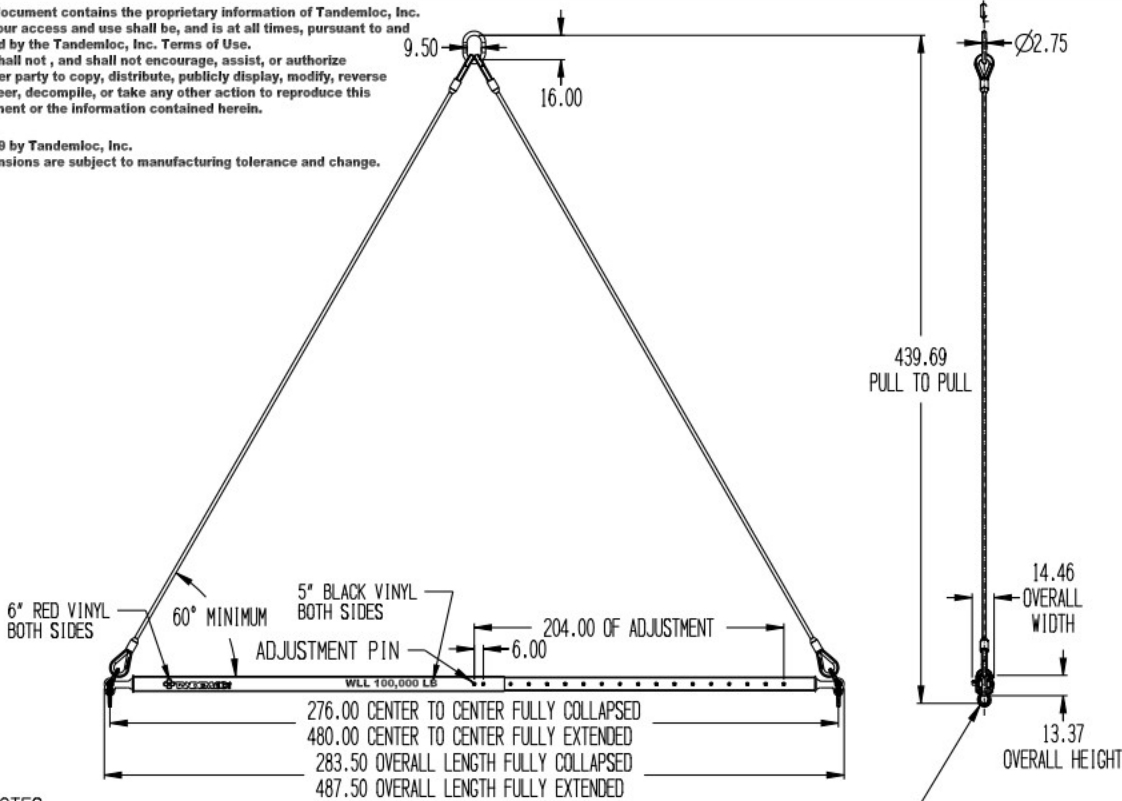

NOTES:

- PART NO.: AT14A100-480-PA, 276"-480" TELESCOPIC SPREADER
AT14A100-480SPA, 276"-480" TELESCOPIC SPREADER WITH TOP SLING
- WLL: 100,000 LB. @ 60° MINIMUM
- PROOF TESTED TO 125% (125,000 LB.) AND CERTIFIED
- STANDARD SPECIFICATION # EAD21000A APPLIES
- FINISH: SANDBLAST AND PRIME AND PAINT YELLOW
- CALCULATED WEIGHT: 2,266 LB. SPREADER WITH SLING: 3,176 LB.
- DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20 AND BTH-1, DESIGN CATEGORY B, SERVICE CLASS 0.

REVISIONS			
NO.	DESCRIPTION	DATE	APPROVED

** DO NOT SIGN IF CHANGES ARE REQUIRED **

CUSTOMER APPROVAL: _____

DATE: _____

<small>1/4" DIMENSIONS UNLESS OTHERWISE NOTED. DIMENSIONS ARE IN INCHES & TOLERANCES ARE: .125 ±.01 .250 ±.015 .500 ±.02</small>	<small>1" DIMENSIONS UNLESS OTHERWISE NOTED. DIMENSIONS ARE IN INCHES & TOLERANCES ARE: 0 TO 4" ±.015 4.014" TO 7" ±.024 7.024" TO 16.1" ±.042 OVER 16.1" ±.082</small>		
		<small>TITLE</small> AT14A100-480-PA 276"-480" TELESCOPIC SPREADER	<small>DATE</small> 12-18-18
<small>THIS DOCUMENT CONTAINS ONLY THE INFORMATION NECESSARY FOR THE PRODUCTION OF THE PARTS LISTED HEREIN. IT IS NOT TO BE USED FOR ANY OTHER PURPOSES WITHOUT THE WRITTEN APPROVAL OF TANDEMLOC, INC.</small>	<small>APPROVALS</small> NAME: [Signature] DATE: 12-18-18	<small>REV. CHG. ORDR</small> D 65059	<small>REV. NO.</small> SAT14A100-480-PA-1