


LIFT BEAM - LO PROFILE (AD16000A-1PA)

Cage Code: 65059 | Drawing No: SAD16000A-1PA | Revision: A | Sheet: 1 of 1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
SEE ELECTRONIC PARTS LIST FOR BILL OF MATERIALS

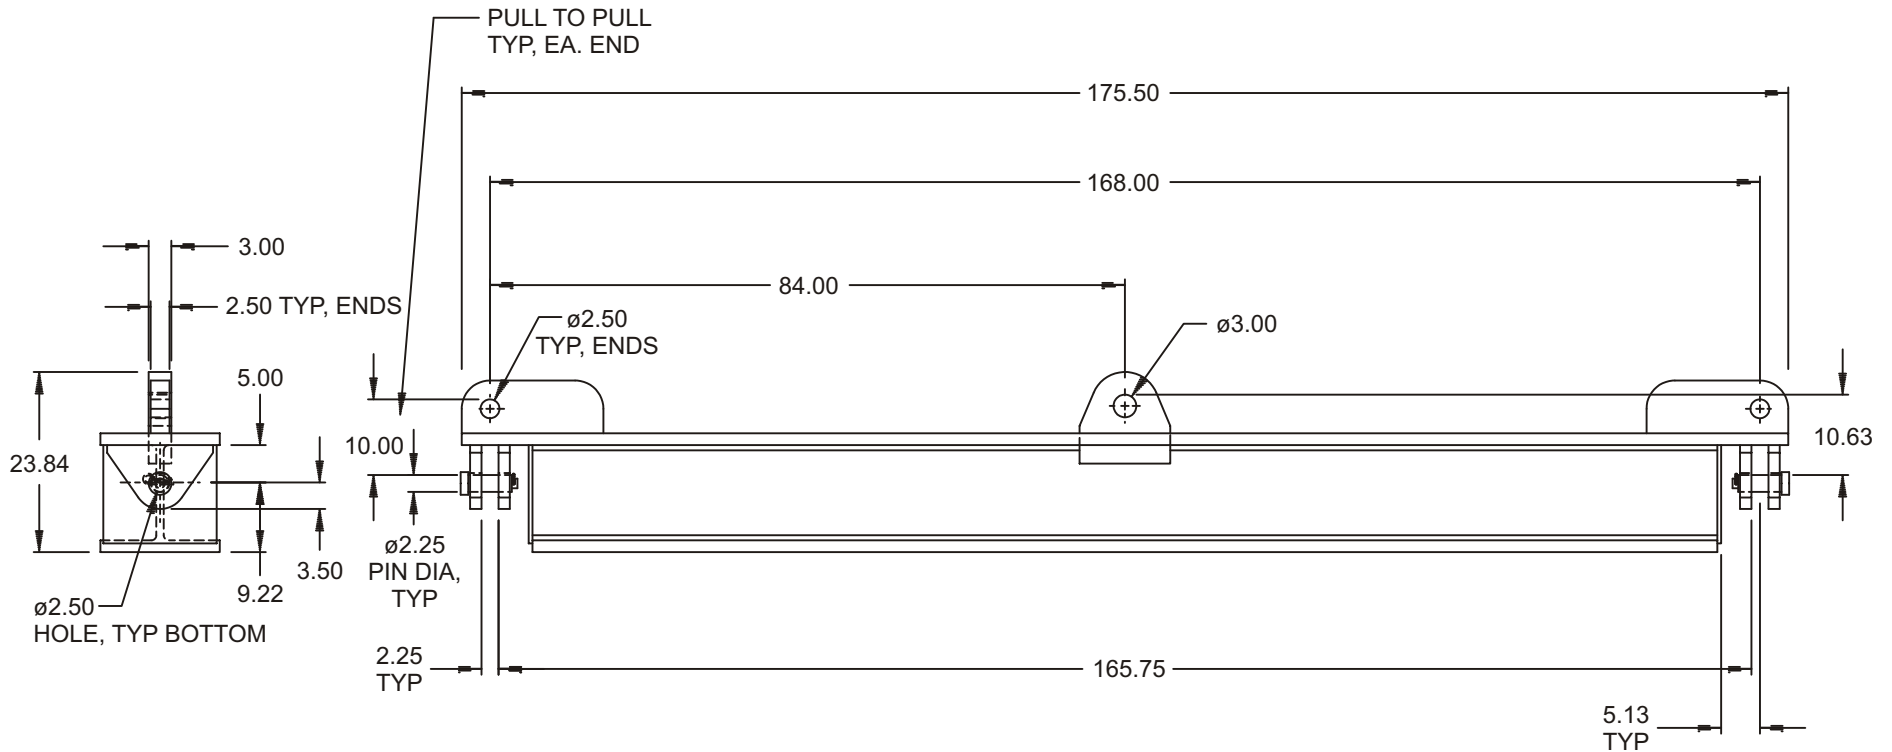

NOTES:

1. P/N: AD16000A-1PA, LIFT BEAM, LOW PROFILE
2. WLL: 40 TONS FOR CENTER PICK, ENDS RATED AT 65,000 LB EACH STRAIGHT PULL
3. PROOF TESTED TO 150% AND CERTIFIED
4. DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20
5. FINISH: SANDBLAST, PRIMED AND PAINTED SAFETY YELLOW
6. CALCULATED WEIGHT: 3,340 LBS

		REVISIONS	
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER CUSTOMER REQUIREMENTS	03-27-03	W.D.D.

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: info@tandemloc.com • www.tandemloc.com
 824 Highway 101 • Havelock, NC 28532
 TEL: 1.800.258.7324 (252.447.7155)
 FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.
 Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.