


ADJUSTABLE FRAME 45' X 17' 40TWLL (AD37000B-1PA)

Cage Code: 65059 | Drawing No: SAD37000B | Revision: -- | Sheet: 1 of 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
DO NOT SCALE DRAWING

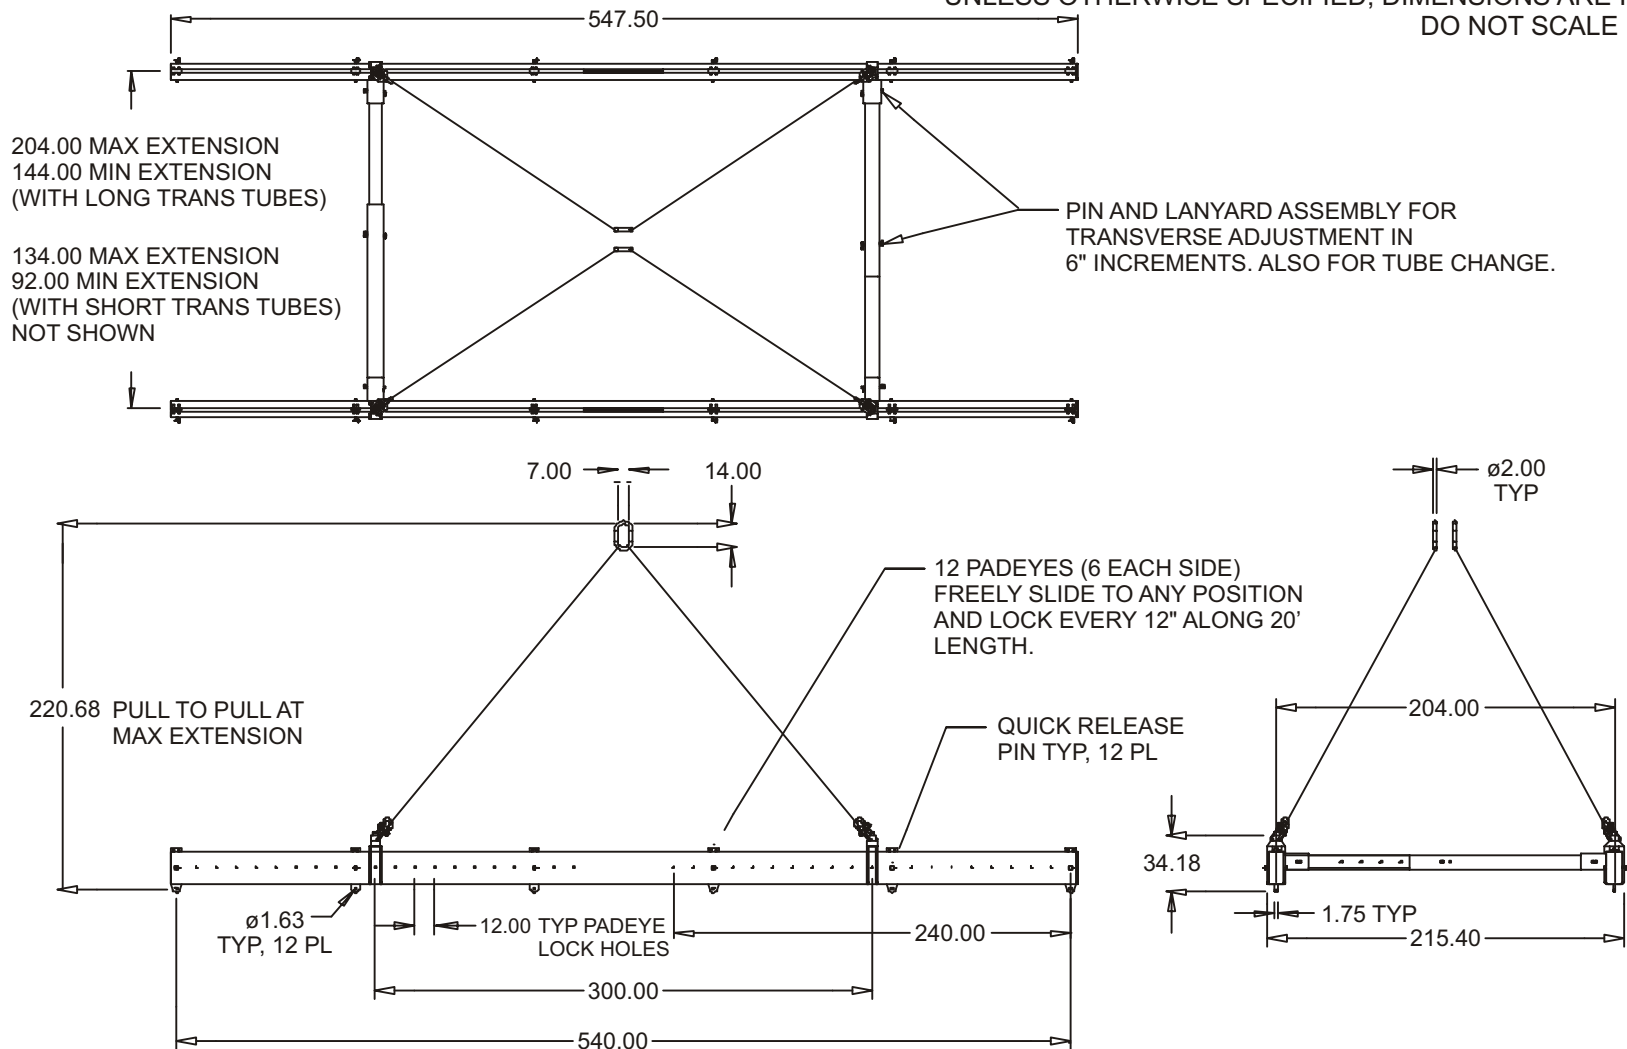

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: info@tandemloc.com • www.tandemloc.com

824 Highway 101 • Havelock, NC 28532

TEL: 1.800.258.7324 (252.447.7155)

FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.

Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.

ADJUSTABLE FRAME ISO VIEW (AD3700B-1PA)

Cage Code: 65059 | Drawing No: SAD37000B | Revision: -- | Sheet: 2 of 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
DO NOT SCALE DRAWING

LONG TRANSVERSE TUBES
FOR ADJUSTMENT FROM 12'
TO 17' IN 6" INCR (SHOWN)
SHORT TRANSVERSE TUBES
FOR ADJUSTMENT FROM 8.5'
TO 12', 6" INCR (INCLUDED,
NOT SHOWN)

CROSBY HR-125 SWIVEL
HOISTS, 30,000 LB CAP.
TYP, 4 PL
(CHECK TORQUE OF SWIVEL
PRIOR TO USE - 800 FT/LB)

2/EA. 2 LEG WIRE ROPE BRIDLE
WITH 2" MASTERLINK AND
17 TON BOLT TYPE ANCHOR
SHACKLES, (4 PL)

SLIDING PADEYE WITH QUICK
RELEASE PINS, 12 PLACES

8 PIN AND LANYARD ASSEMBLIES
FOR TRANSVERSE ADJUSTMENT
AND TUBE INSTALLATION. (2 SPARE)

PADEYES RATED TO 10 TON
MAX LOAD EACH. TOTAL FRAME
RATED AT 40 TON MAX LOAD
(20 TON MAX LOAD EACH SIDE)

NOTES:

1. P/N: AD37000B-1PA, ADJUSTABLE FRAME WITH SLING
2. WLL: 40 TONS
3. PROOF TESTED TO 125% (100,000) AND CERTIFIED
4. DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20
5. CALCULATED WEIGHT: 17,675 LB (FRAME WITH LONG TRANS TUBES)
520 LB (SLING ASSEMBLY)
6. FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: info@tandemloc.com • www.tandemloc.com
824 Highway 101 • Havelock, NC 28532
TEL: 1.800.258.7324 (252.447.7155)
FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.
Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.