


# LIFT PLATE W/ HOOKS (AE06000A-1PA)

Cage Code: 65059 | Drawing No: SAE06000A | Revision: C | Sheet: 1 of 1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES  
SEE ELECTRONIC PARTS LIST FOR BILL OF MATERIALS  
DO NOT SCALE DRAWING

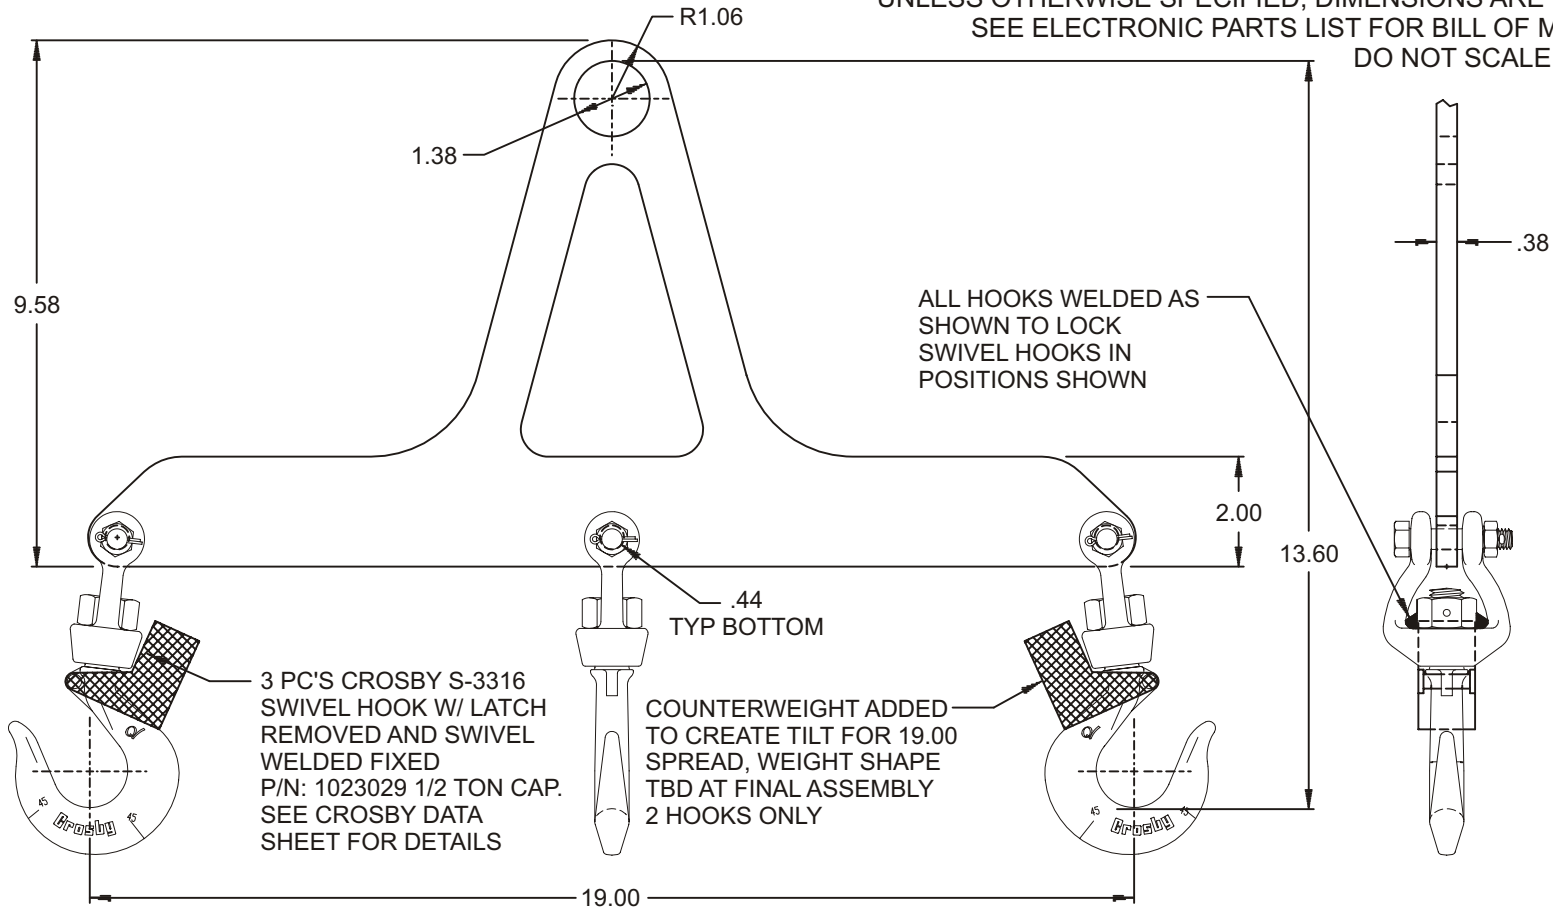

ALL HOOKS WELDED AS SHOWN TO LOCK SWIVEL HOOKS IN POSITIONS SHOWN

3 PC'S CROSBY S-3316 SWIVEL HOOK W/ LATCH REMOVED AND SWIVEL WELDED FIXED P/N: 1023029 1/2 TON CAP. SEE CROSBY DATA SHEET FOR DETAILS

COUNTERWEIGHT ADDED TO CREATE TILT FOR 19.00 SPREAD, WEIGHT SHAPE TBD AT FINAL ASSEMBLY 2 HOOKS ONLY

**NOTE:**

1. P/N: AE06000A-1PA, LIFT BEAM W/ HOOKS
2. WLL: 500 LB
3. PROOF TESTED TO 125% (625 LB) AND CERTIFIED
4. DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20
5. FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW
6. CALCULATED WEIGHT: 10 LB.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER CUSTOMER REQUIREMENTS	04-13-04	W.D.D.
B	REVISED HOLE 1.38 WAS .75 DIA.	04-15-04	W.D.D.
C	ADDED COUNTERWEIGHT FOR 19 SPREAD	04-18-04	W.D.D.

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: [info@tandemloc.com](mailto:info@tandemloc.com) • [www.tandemloc.com](http://www.tandemloc.com)  
824 Highway 101 • Havelock, NC 28532  
TEL: 1.800.258.7324 (252.447.7155)  
FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.  
Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.