


PROOF TEST SPREADER TO 125% (5,625 LB)
 MARK WITH WLL: 4,500 LB (DESIGN LIMIT LOAD: 13,500 LB)
 PROOF TEST WIRE ROPE LEGS TO 200% (6,000 LB)
 MARK WITH WLL: 3,000 LB EACH (DESIGN LIMIT LOAD: 9,000 LB)

TELESCOPIC SPREADER (AE22000A-1PA)

Cage Code: 65059 | Drawing No: SAE22000A | Revision: B | Sheet: 1 of 1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

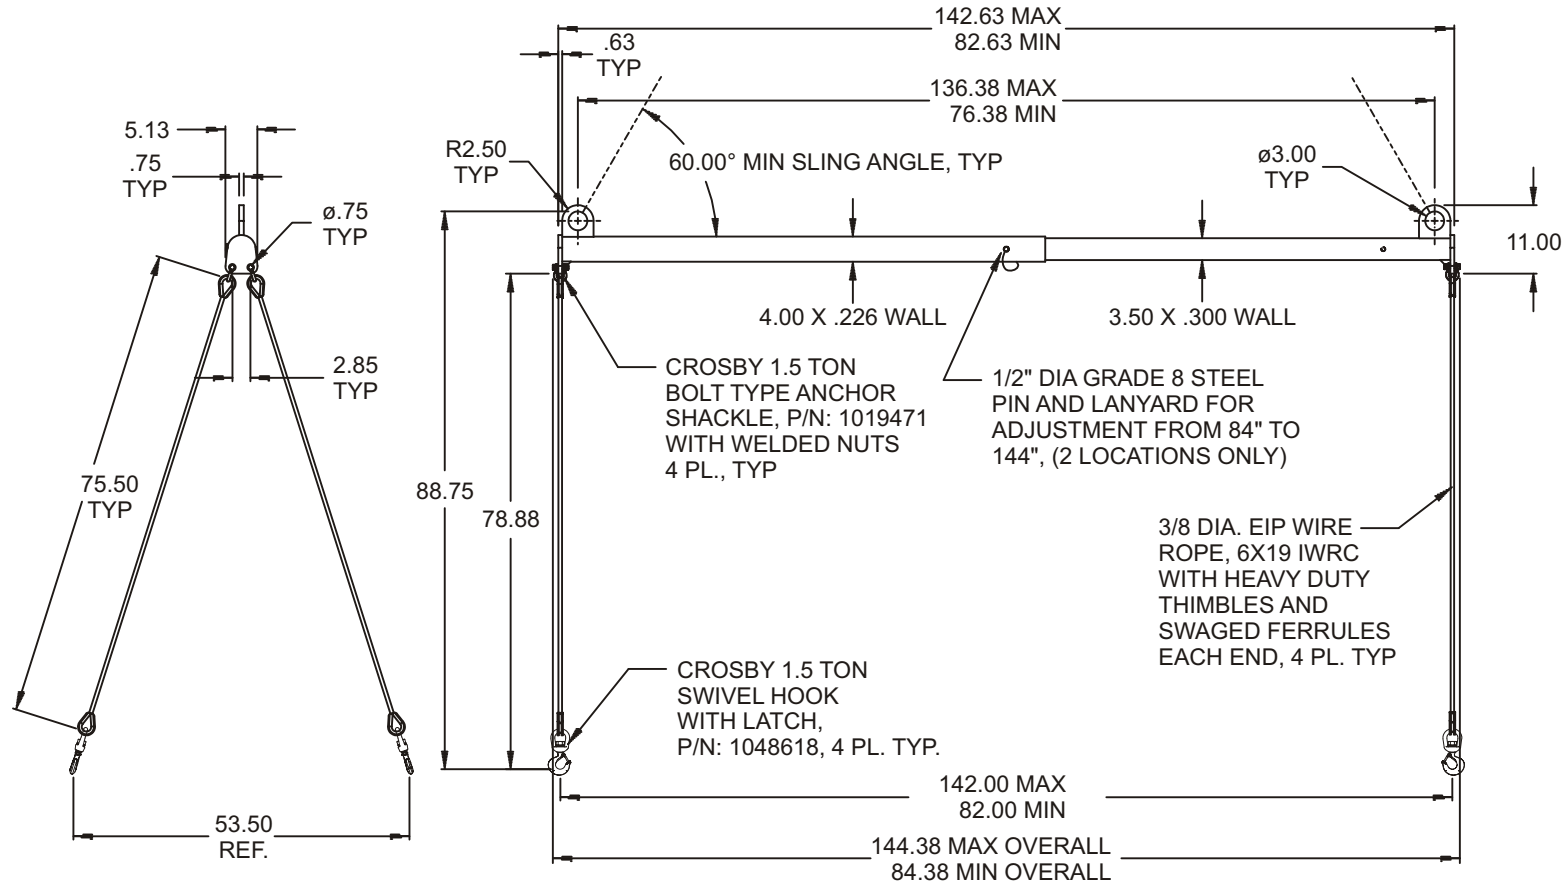

NOTES:

1. P/N: AE22000A-1PA, TELESCOPIC SPREADER ASS'Y
2. WLL: 2.25 TONS (4,500 LB)
3. DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20 AND MIL STD 209J
4. FINISH: SANDBLAST, PRIMED AND PAINT 33303 DESERT TAN, SPREADER
5. CALCULATED WEIGHT: 145 LB. (SPREADER), 38 LB. (RIGGING)
6. MARKED PER ASME B30.20 WITH DATA PLATE AND VINYL LETTERING
7. PROOF TESTED AND CERTIFIED PER NOTE ABOVE

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER CUSTOMER REQUIREMENTS	06/30/04	W.D.D.
B	REVISED WIRE ROPE WAS 9/16"	07/07/04	MD

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: info@tandemloc.com • www.tandemloc.com
 824 Highway 101 • Havelock, NC 28532
 TEL: 1.800.258.7324 (252.447.7155)
 FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.

Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.