


# HYDRAULIC LIFT CASTER ASSEMBLY (R17000E)

Cage Code: 65059 | Drawing No: SR17000E | Revision: - | Sheet: 1 of 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

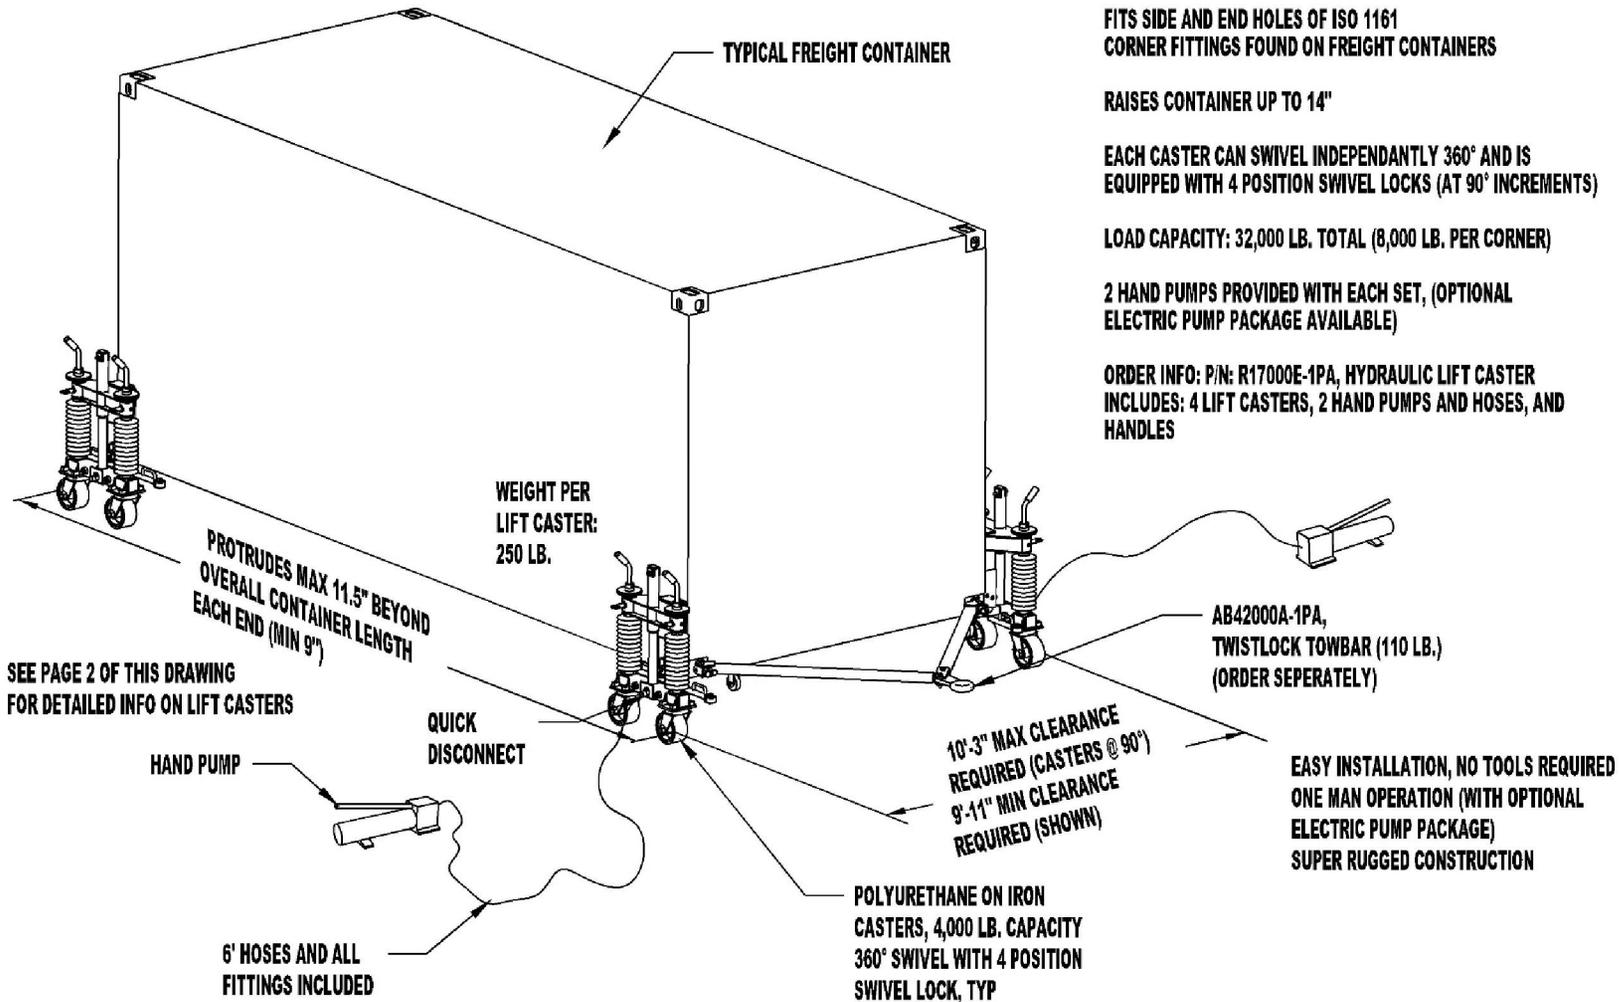

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit).

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein. © Copyright 2014 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: [info@tandemloc.com](mailto:info@tandemloc.com) • [www.tandemloc.com](http://www.tandemloc.com)

824 Highway 101 • Havelock, NC 28532

Tel: 1.800.258.7324 (252.447.7155)

FAX 1.800.892.3273 (252.447.5502)


Tandemloc, Inc. designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.

Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.

# HYDRAULIC LIFT CASTER ASSEMBLY (R17000E)

Cage Code: 65059 | Drawing No: SR17000E | Revision: - | Sheet: 2 of 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

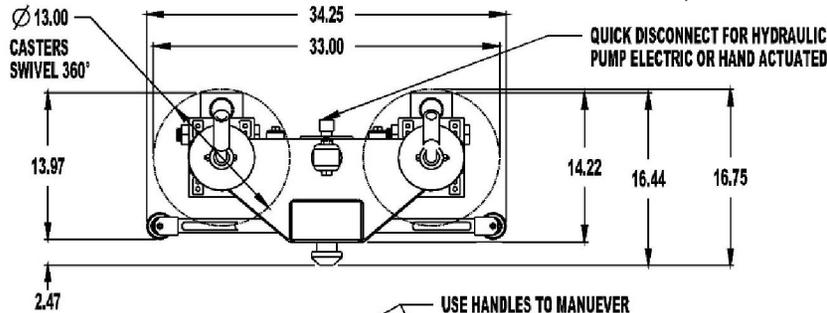


STANDARD SET OF FOUR (P/N: R17000A-1PA) INCLUDES 4 LIFT CASTER ASSEMBLIES, HANDLES (FOR TRAVEL) AND 2 HAND PUMPS WITH 6' HOSES AND QUICK-DISCONNECT FITTINGS. AN ELECTRIC PUMP WITH MANIFOLD AND 4 LINES IS AVAILABLE AS AN OPTION.

IMPORTANT: LIFT ONE END (TWO LIFT CASTER ASSEMBLIES SIMULTANEOUSLY), OF THE CONTAINER AT A TIME, OR BOTH ENDS AT ONCE (ELECTRIC PUMP OPTION (1 PERSON) OR TWO ADDITIONAL HAND PUMPS (4 PERSONS) REQUIRED TO LIFT BOTH ENDS AT ONCE)


**ADDITIONAL NOTES:**

1. P/N: R17000A-1PA, HYDRAULIC LIFT CASTERS FOR FREIGHT CONTAINERS (SET OF 4)
2. WLL: 8,000 LB. CAP PER LIFT CASTER (32,000 LB. TOTAL CAPACITY)
3. WEIGHT: 1,200 LB. PER SET OF 4, ESTIMATED
4. FINISH: PAINTED BLUE

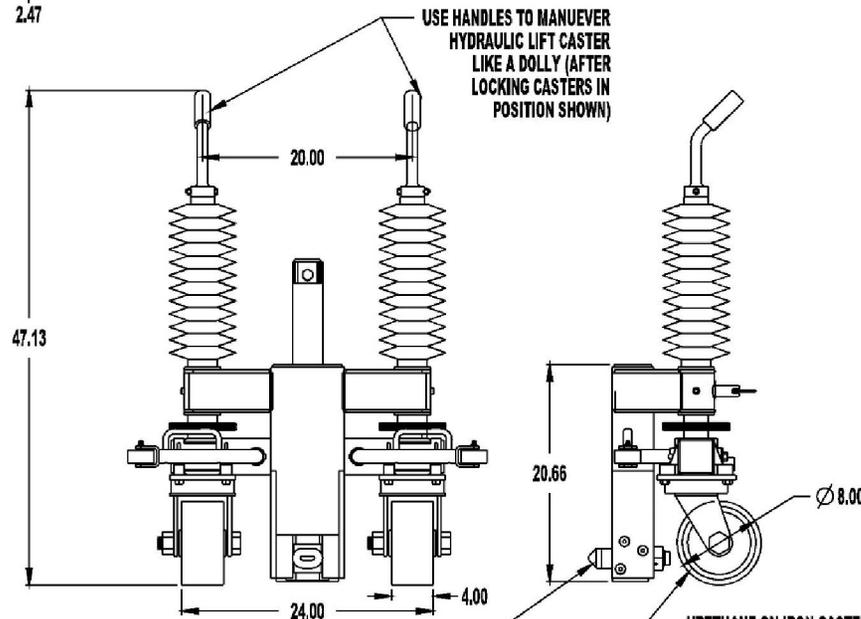

PLUGS IN EITHER SIDE OR END HOLE OF STANDARD ISO 1161 CORNER FITTING. ROTATE 90° TO LOCK, TIGHTENS AUTOMATICALLY AS CONTAINER IS LIFTED. WHEN USED IN SIDE HOLES, TANDEMLOC TOWBAR AB42000A-1PA IS STRONGLY RECOMMENDED FOR TROUBLE FREE TOWING

URETHANE ON IRON CASTERS WITH 360° SWIVEL, 4 POSITION SWIVEL LOCKS, 4,000 LB. CAP EACH. TYPICAL INSTALLATION: LEAD ASSEMBLIES LEFT FREE TO ROTATE WHILE TRAILING ONES ARE LOCKED IN THE DESIRED DIRECTION OF TRAVEL. OTHER CASTER TYPES OPTIONALLY AVAILABLE.

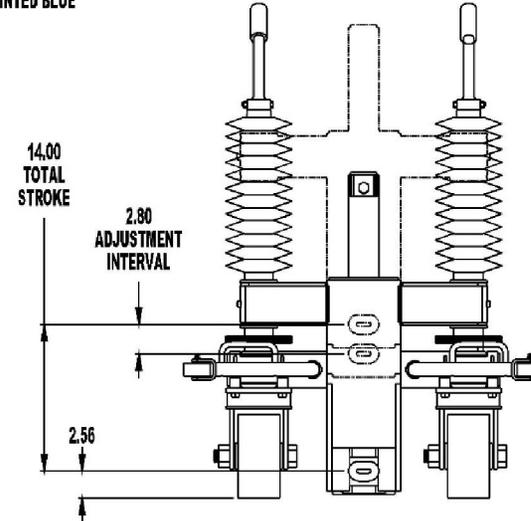

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit).

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein. © Copyright 2014 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: [info@tandemloc.com](mailto:info@tandemloc.com) • [www.tandemloc.com](http://www.tandemloc.com)

824 Highway 101 • Havelock, NC 28532

Tel: 1.800.258.7324 (252.447.7155)

FAX 1.800.892.3273 (252.447.5502)

Tandemloc, Inc. designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.

Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.