


LIFT BEAM, ADJUSTABLE, 23' TO 40', WLL 15 T. (S4000E-1PA)

Cage Code: 65059 | Drawing No: SS4000E | Revision: -- | Sheet: 1 of 1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

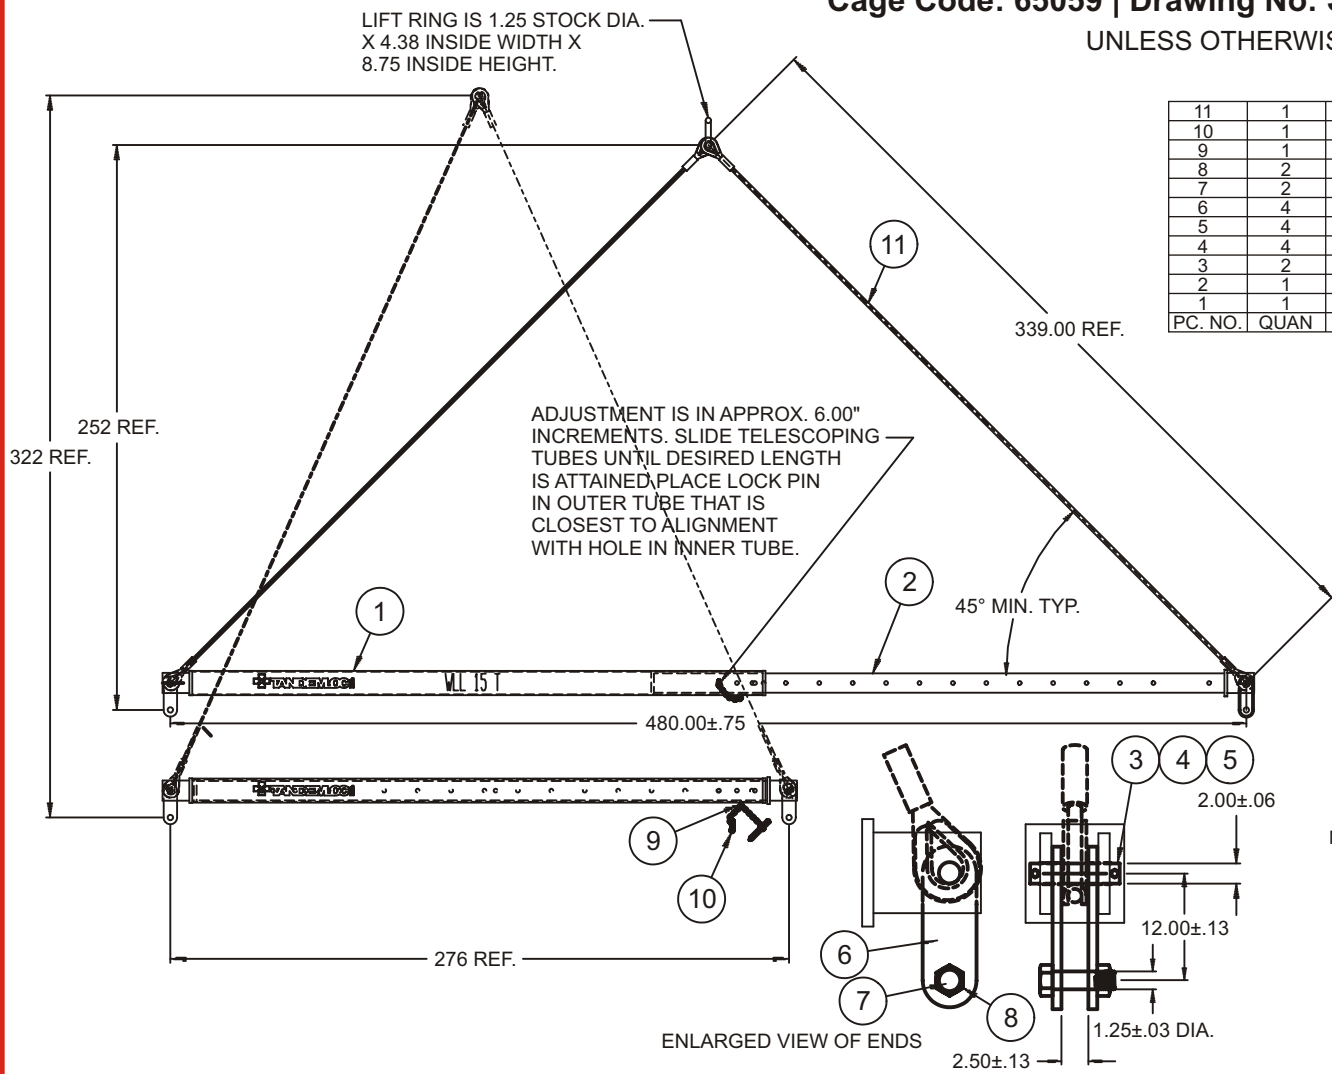

LIST OF MATERIALS

PC. NO.	QUAN	PART NO. AND DESCRIPTION
11	1	S4000D-410 TWO LEG SLING
10	1	S4000D-100 ADJUSTER PIN & LANYARD
9	1	\$COE687492 "S" HOOK STEEL, ZN PLATED
8	2	UPT012507000077 LOCKNUT, THIN, STL ZN PL PLAS INS
7	2	WHB012507000550 HEX BOLT GR 8 STL, ZN PLATED
6	4	S4000D-21P LINK, PAINTED
5	4	UPS005013000061 LOCKNUT STEEL, ZN PLATED PLAS. INS.
4	4	WHB005013000300 HEX BOLT GR 8 STL, ZN PLATED
3	2	S4000D-22P HINGE PIN, PAINTED
2	1	S4000E-3PA INNER TUBE ASSEMBLY, PAINTED
1	1	S4000E-2PA OUTER TUBE ASSEMBLY, PAINTED

NOTE:

1. MATERIAL: STEEL
2. WEIGHT: ADJ. BEAM - 1714 LB
3. WORK LOAD LIMIT(WLL) 15 T. (30,000LB.)
4. PROOF TEST WLL X 125%.
5. LIFT FROM TOP RING WITH 50% OF LOAD SUSPENDED VERTICALLY FROM EACH END CLEVIS.

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: info@tandemloc.com • www.tandemloc.com

824 Highway 101 • Havelock, NC 28532

TEL: 1.800.258.7324 (252.447.7155)

FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.

Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.