


This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use. You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein.

©2023 by Tandemloc, Inc. Dimensions are subject to manufacturing tolerance and change.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REDESIGNED LIFT BEAM	03-06-23	DAH

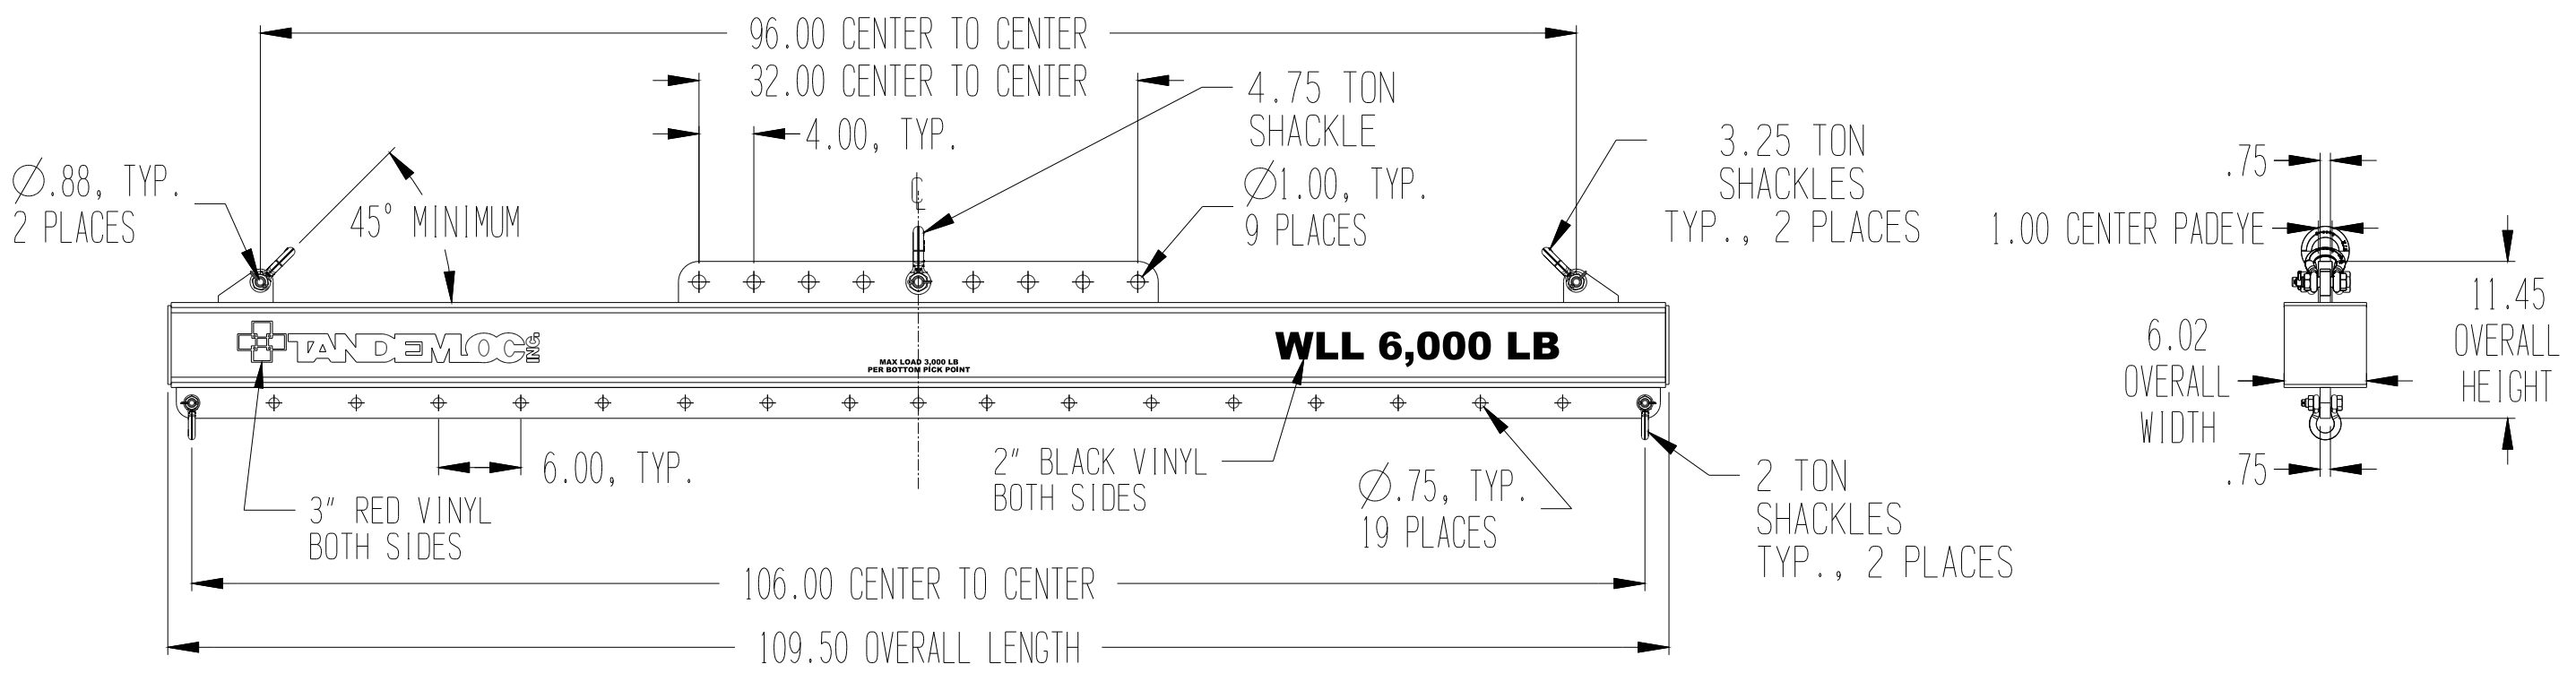

- NOTES:
- PART NO.: AL50J00-00A-PA, 6,000 LB. WLL LIFT BEAM WITH SHACKLES
AL50J00-NSA-PA, 6,000 LB. WLL LIFT BEAM NO SHACKLES
 - WLL: 6,000 LB.
 - PROOF TESTED TO 125% (7,500 LB.) AND CERTIFIED
 - STANDARD SPECIFICATION # EAD21000A APPLIES
 - FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW
 - CALCULATED WEIGHT: 278 LB. W/ SHACKLES 272 LB. W/OUT SHACKLES
 - DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20 AND BTH-1, DESIGN CATEGORY B, SERVICE CLASS 0.

**** DO NOT SIGN IF CHANGES ARE REQUIRED ****

CUSTOMER APPROVAL: _____

DATE: _____

<input checked="" type="checkbox"/> *X* DENOTES APPLICABLE DATA UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES & TOLERANCES ARE: .XX ±.06 .XXXX ±.0007 .XXX ±.03	<input type="checkbox"/> *Y* DENOTES APPLICABLE DATA LOST WAX CASTING TOL. IS: 0 TO 4" ±.030 , 4.01" TO 7" ±.038" 7.01" TO 10.5" ±.045" OVER 10.5" ±.052"		
		TITLE AL50J00-00A-PA 6,000 LB. WLL LIFT BEAM	
THIS DOCUMENT CONTAINS DATA WHICH IS EITHER PATENTED, PATENT PENDING OR IS THE PROPERTY OF TANDEMLOC, INC. DISCLOSURE, OR COPYING WITHOUT THE WRITTEN AUTHORIZATION OF TANDEMLOC, INC. IS EXPRESSLY PROHIBITED.		APPROVALS DRAWN DAH	DATE 10-10-18
SIZE D	CAGE CODE 65059	DWG NO. SAL50J00	REV. A
SCALE	CALC. BY	ACT. BY	SHEET 1 OF 1