


### 3 Ton Multi-Pick Lifting Beam, WLL 6,000 LB. (AL50J00-00A-PA)

Cage Code: 65059 | Drawing No: AL50J00-00A-PA | Revision: A | Sheet: 1 of 1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

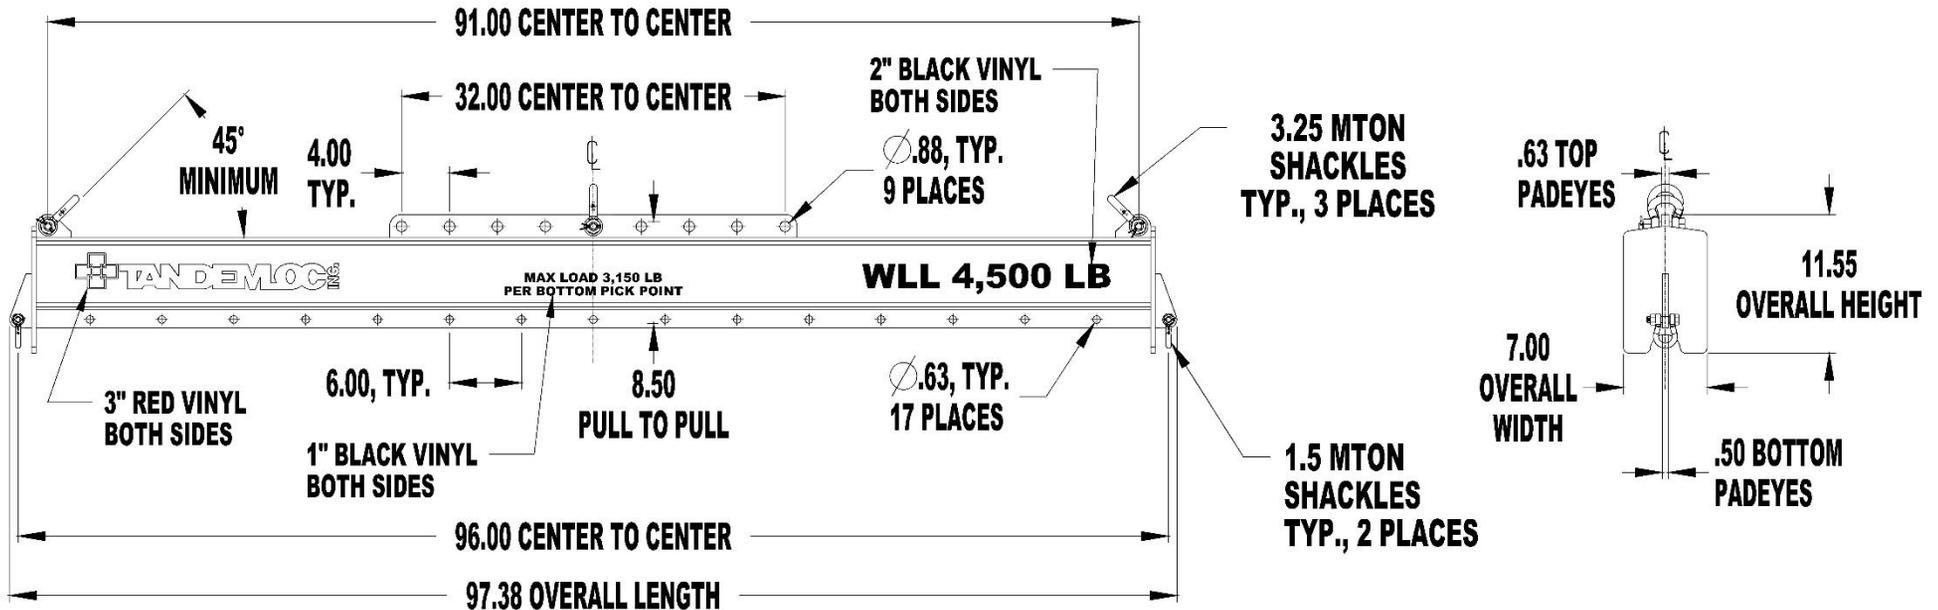

**NOTES:**

1. PART NO.: AL50J00-00A-PA, 6,000 LB. WLL LIFT BEAM WITH SHACKLES  
AL50J00-NSA-PA, 6,000 LB. WLL LIFT BEAM NO SHACKLES
2. WLL: 4,500 LB.
3. PROOF TESTED TO 125% (5,625 LB.) AND CERTIFIED
4. STANDARD SPECIFICATION # EAD21000A APPLIES
5. FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW
6. CALCULATED WEIGHT: 175 LB. W/ SHACKLES 169 LB. W/OUT SHACKLES
7. DESIGNED AND MANUFACTURED TO MEET OR EXCEED  
ASME B30.20 AND BTH-1, DESIGN CATEGORY B,  
SERVICE CLASS 0.
8. MAX LOAD PER BOTTOM PICK POINT 3,150 LB.

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit).

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein. © Copyright 2014 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: [info@tandemloc.com](mailto:info@tandemloc.com) • [www.tandemloc.com](http://www.tandemloc.com)  
824 Highway 101 • Havelock, NC 28532  
Tel: 1.800.258.7324 (252.447.7155)  
FAX 1.800.892.3273 (252.447.5502)

Tandemloc, Inc. designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.

Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.