


This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use. You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein.

©2019 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.

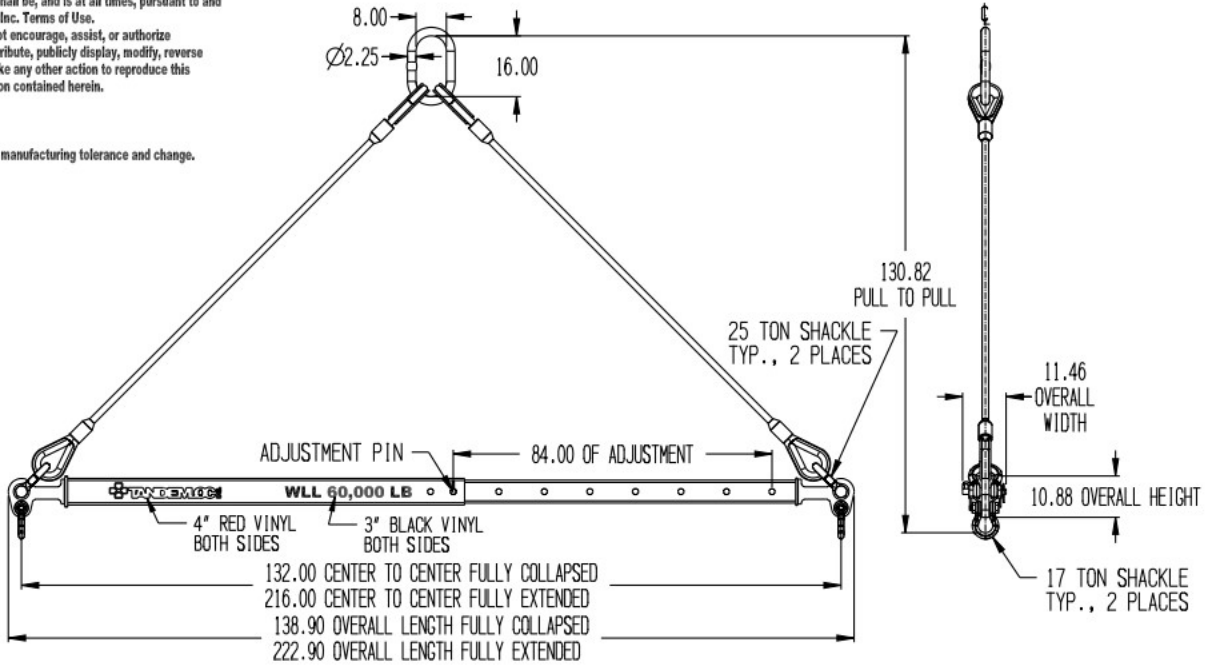

NOTES:

- PART NO.: AT14A060-216-PA, 132"-216" TELESCOPIC SPREADER
 AT14A060-216SPA, 132"-216" TELESCOPIC SPREADER WITH TOP SLING
 AT14A060-216WPA, 132"-216" TELESCOPIC SPREADER WITHOUT SHACKLES
- WLL: 60,000 LB. @ 45° MINIMUM
- PROOF TESTED TO 125% (75,000 LB.) AND CERTIFIED
- STANDARD SPECIFICATION # EAD21000A APPLIES
- FINISH: SANDBLAST AND PRIME AND PAINT YELLOW
- CALCULATED WEIGHT: 752 LB. SPREADER WITH SLING; 1,160 LB. WITHOUT SHACKLES; 645 LB.
- DESIGNED AND MANUFACTURED TO MEET OR EXCEED
 ASME B30.20 AND BTH-1, DESIGN CATEGORY B, SERVICE CLASS 0.

** DO NOT SIGN IF CHANGES ARE REQUIRED **

CUSTOMER APPROVAL: _____

DATE: _____

<small>1/4" DIMENSIONS UNLESS OTHERWISE NOTED. DIMENSIONS ARE IN INCHES & TOLERANCES ARE: .125, .250, .500, .001, .002</small>		<small>1" DIMENSIONS UNLESS OTHERWISE NOTED. DIMENSIONS ARE IN INCHES & TOLERANCES ARE: .005, .010, .015, .020, .030, .040, .050, .060, .070, .080, .090, .100, .125, .150, .175, .200, .250, .300, .375, .500, .625, .750, .875, 1.000</small>		
<small>THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF TANDEMLOC, INC. REPRODUCTION OR DISTRIBUTION WITHOUT THE WRITTEN PERMISSION OF TANDEMLOC, INC. IS PROHIBITED.</small>		<small>DATE: 09-15-19</small>		
<small>APPROVALS:</small> <small>DESIGNER: [Signature]</small> <small>CHECKED: [Signature]</small>		<small>DATE: 09-15-19</small>		AT14A060-216-PA 132"-216" TELESCOPIC SPREADER
<small>DATE: 09-15-19</small>		<small>DATE: 09-15-19</small>		