
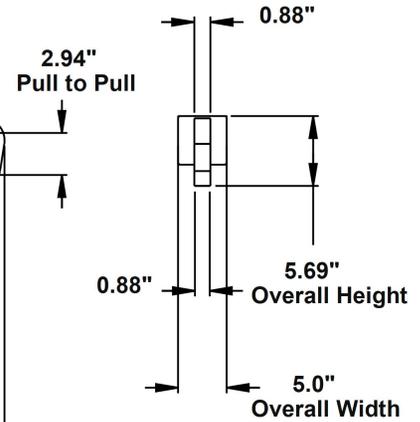
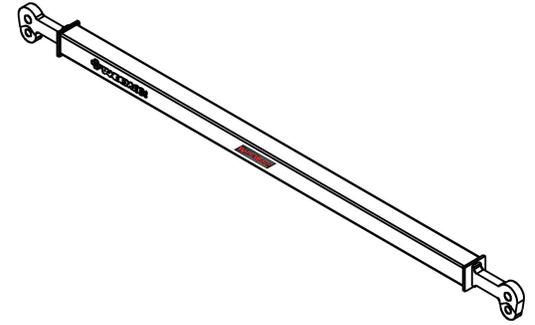


This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein.

©2019 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.

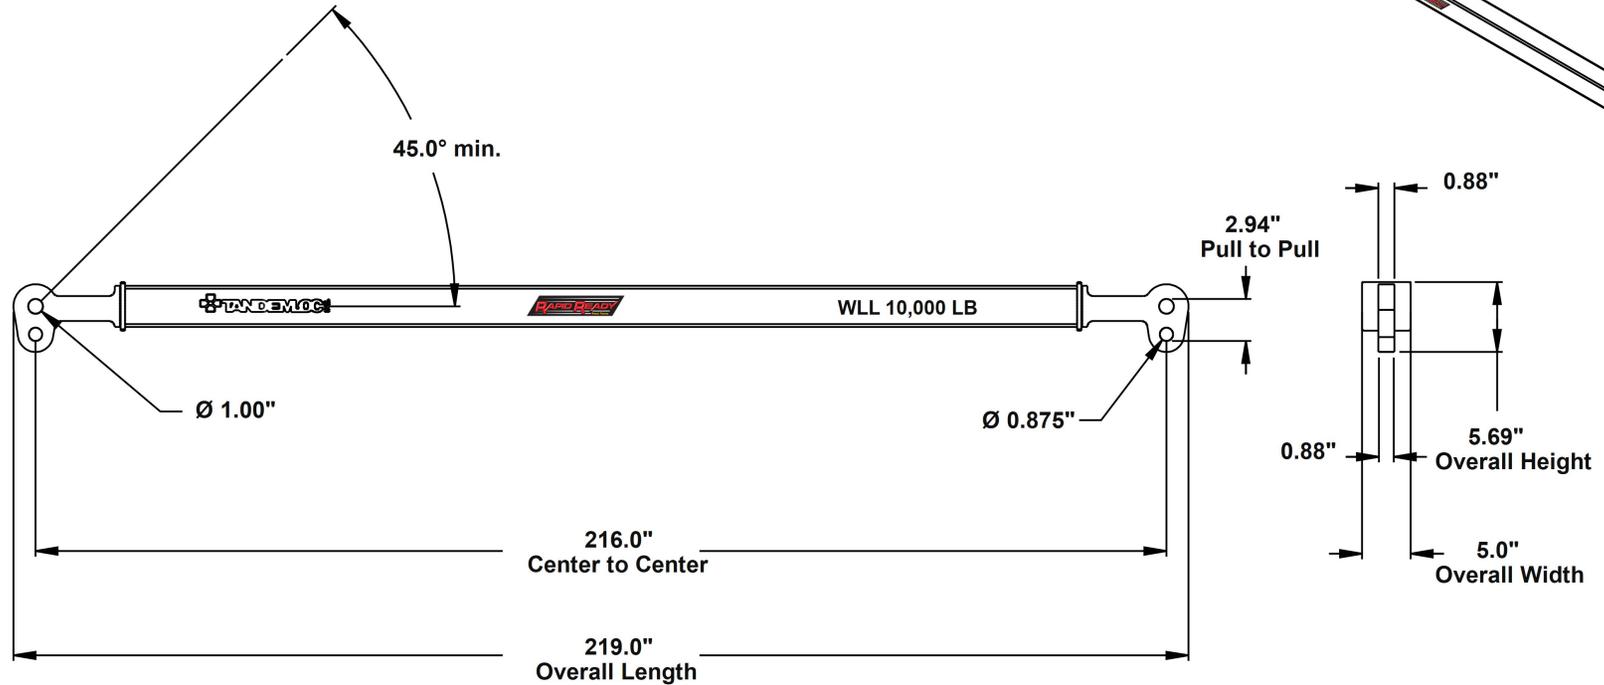

Include (2) two bottom shackles, Not Shown

NOTES:

1. PART NO.: AT08A010-216-PA 5.0 TON SPREADER BEAM
2. WLL: 10,000 LB.
3. PROOF TESTED TO 125% ( 12,727 LB.) AND CERTIFIED
4. STANDARD SPECIFICATION # EAD21000A APPLIES
5. FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW
6. CALCULATED WEIGHT: 227 LB.
7. DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20 AND BTH-1, DESIGN CATEGORY B, SERVICE CLASS 0.

\*\* DO NOT SIGN IF CHANGES ARE REQUIRED \*\*

CUSTOMER APPROVAL: \_\_\_\_\_

DATE: \_\_\_\_\_

<small>1 1/2" INCHES APPLICABLE UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES &amp; TOLERANCES ARE:          .XX ±.00 .XXX ±.007          .XXX ±.00</small>		<small>1" INCHES APPLICABLE UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES &amp; TOLERANCES ARE:          0 TO 4" ±.000, 4.00" TO 7" ±.008          7.00" TO 10.5" ±.007          OVER 10.5" ±.002</small>			
<small>THIS DOCUMENT CONTAINS DATA WHICH IS EITHER PATENTED, PATENT PENDING OR IS THE PROPERTY OF TANDEMLOC, INC. DISCLOSURE, OR COPYING WITHOUT THE WRITTEN AUTHORIZATION OF TANDEMLOC, INC. IS EXPRESSLY PROHIBITED.</small>				<small>APPROVALS</small> <small>DATE</small>	
<small>INFORM</small>				<small>2/17/2028</small>	
<small>TITLE</small> <b>AT08A010-216-PA</b>		<b>5.0 Ton Spreader Beam</b>			
<small>SIZE</small> <b>D</b>		<small>CODE</small> <b>65059</b>		<small>PART NO.</small> <b>SAT08A010-216</b>	
<small>SCALE</small>		<small>MAX</small>		<small>SHEET 1 OF 1</small>	