


# LOAD LEVELING SPREADER, 26,500 LB WLL - 20 FT. (AA45000C-1PA)

Cage Code: 65059 | Drawing No: SAA45000C | Revision: -- | Sheet: 1 of 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

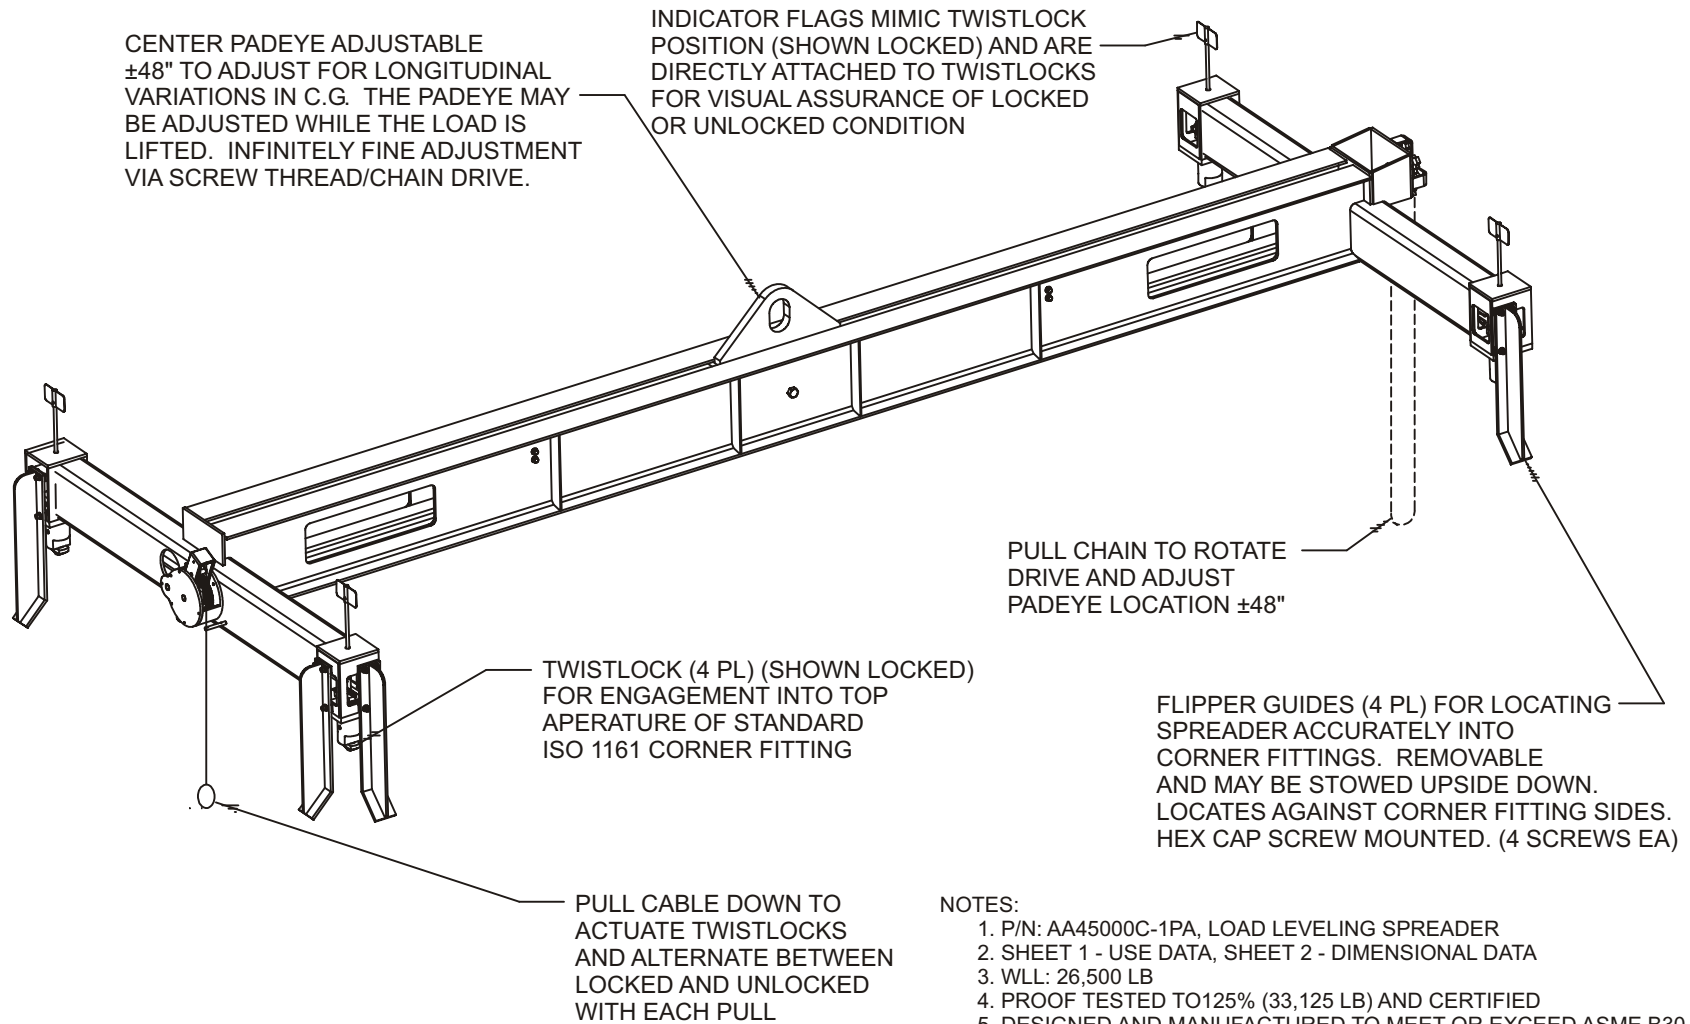

#### NOTES:

1. P/N: AA45000C-1PA, LOAD LEVELING SPREADER
2. SHEET 1 - USE DATA, SHEET 2 - DIMENSIONAL DATA
3. WLL: 26,500 LB
4. PROOF TESTED TO 125% (33,125 LB) AND CERTIFIED
5. DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20
6. CALCULATED WEIGHT: 3400 LB
7. FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW

**DANGER:** Never Exceed WLL (Working Load Limit)

This document contains data which is either patented, patent pending or is the property of Tandemloc, Inc.

Disclosure, or copying without the written authorization of Tandemloc, Inc. is expressly prohibited. © Copyright 2010 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: [info@tandemloc.com](mailto:info@tandemloc.com) • [www.tandemloc.com](http://www.tandemloc.com)  
PO Box 279 • 824 Highway 101 • Havelock, NC 28532-0279  
TEL: 1.800.258.7324 (252.447.7155)  
FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.

Tandemloc is a member of:



