



This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use. You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein.

©2026 by Tandemloc, Inc.  
 Dimensions are subject to manufacturing tolerance and change.

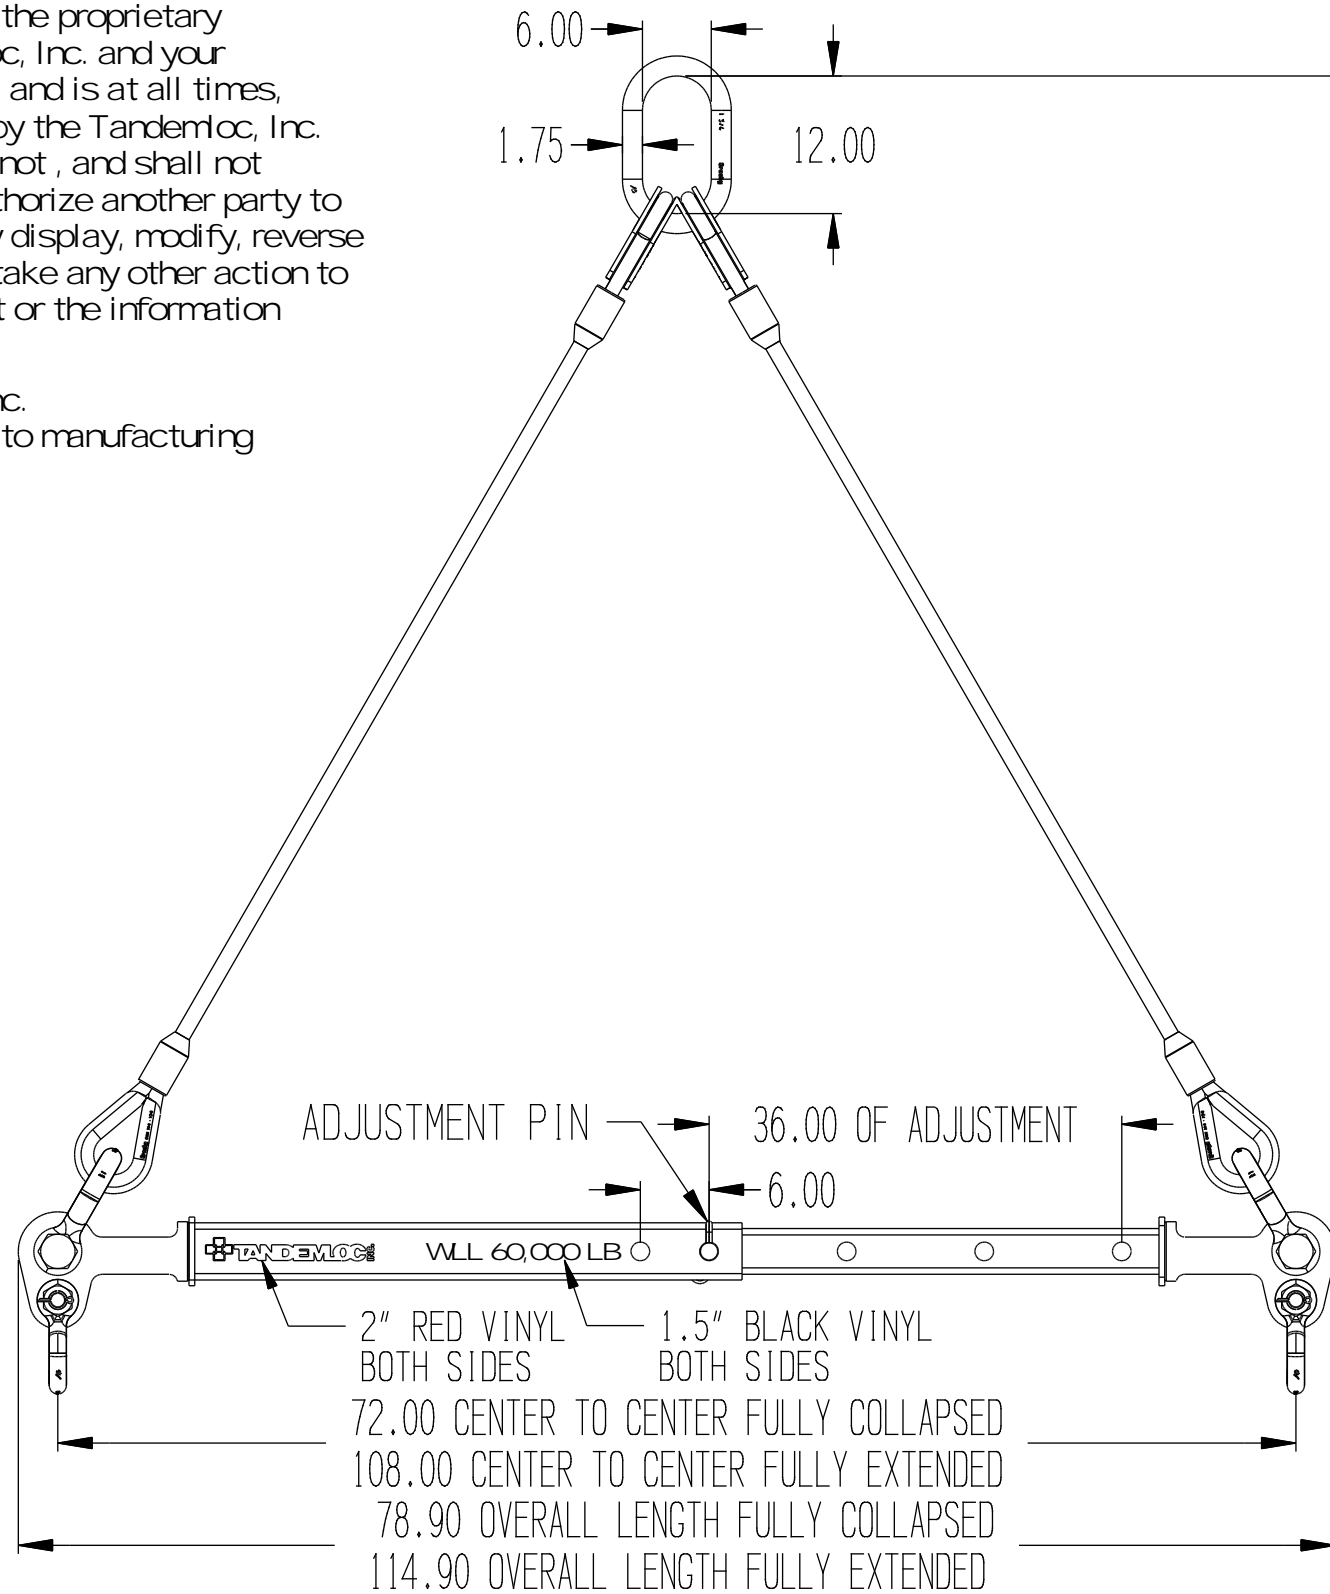

113.35  
 PULL TO PULL

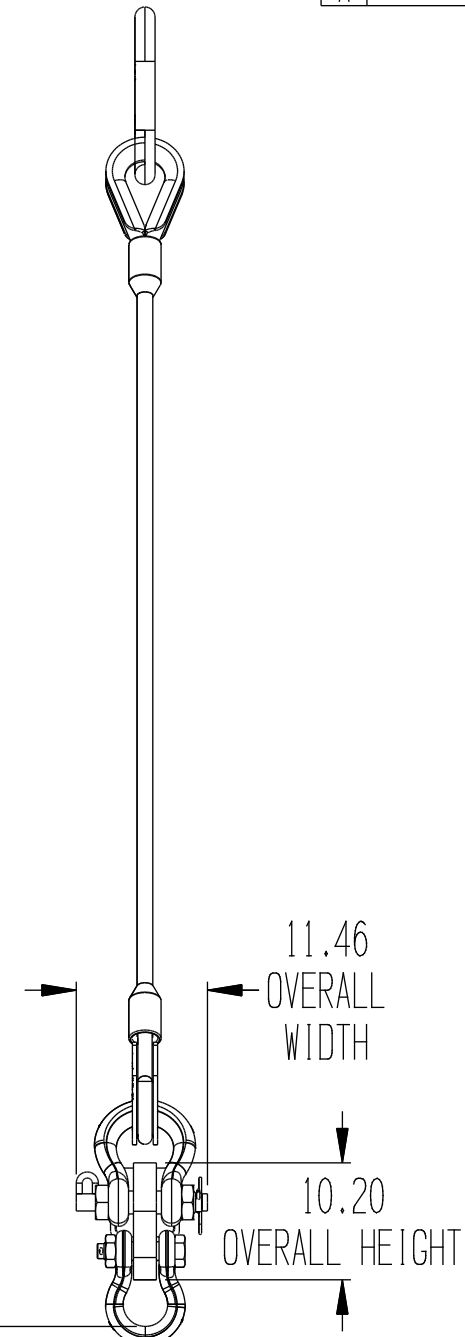

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	TOP SLING CHANGED TO A 60 DEGREE SLING	08-24-21	DAH

NOTES:

- PART NO.: AT14A060-108-PA, 72"-108" TELESCOPIC SPREADER  
 AT14A060-108SPA, 72"-108" TELESCOPIC SPREADER WITH TOP SLING
- WLL: 60,000 LB. @ 60° MINIMUM
- PROOF TESTED TO 125% (75,000 LB.) AND CERTIFIED
- STANDARD SPECIFICATION # EAD21000A APPLIES
- FINISH: SANDBLAST AND PRIME AND PAINT YELLOW
- CALCULATED WEIGHT: 369 LB. SPREADER WITH SLING: 583 LB.
- DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20 AND BTH-1, DESIGN CATEGORY B, SERVICE CLASS 0.

**\*\* DO NOT SIGN IF CHANGES ARE REQUIRED \*\***

**CUSTOMER APPROVAL:** \_\_\_\_\_

**DATE:** \_\_\_\_\_

<input checked="" type="checkbox"/> *X* DENOTES APPLICABLE DATA UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES & TOLERANCES ARE: .XX ±.06 .XXXX ±.0007 .XXX ±.03	<input type="checkbox"/> *Y* DENOTES APPLICABLE DATA LOST WAX CASTING TOL. IS: 0 TO 4" ±.030 , 4.01" TO 7" ±.038" 7.01" TO 10.5" ±.045" OVER 10.5" ±.052"		
		TITLE AT14A060-108-PA 72"-108" TELESCOPIC SPREADER	
THIS DOCUMENT CONTAINS DATA WHICH IS EITHER PATENTED, PATENT PENDING OR IS THE PROPERTY OF TANDEMLOC, INC. DISCLOSURE, OR COPYING WITHOUT THE WRITTEN AUTHORIZATION OF TANDEMLOC, INC. IS EXPRESSLY PROHIBITED.		APPROVALS DRAWN DAH	DATE 03-19-19
SIZE D	CAGE CODE 65059	DWG NO. SAT14A060-108-PA	REV. A
SCALE		SHEET	1 OF 1